
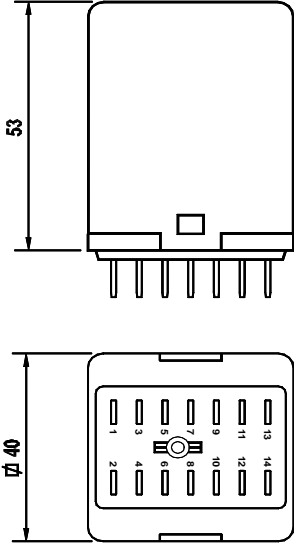
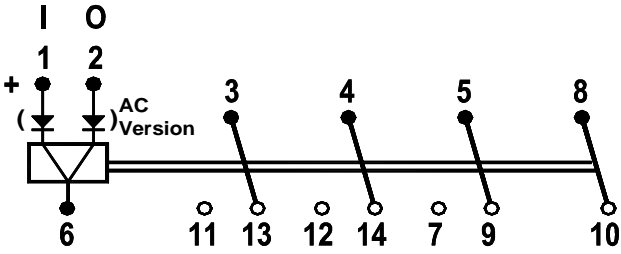
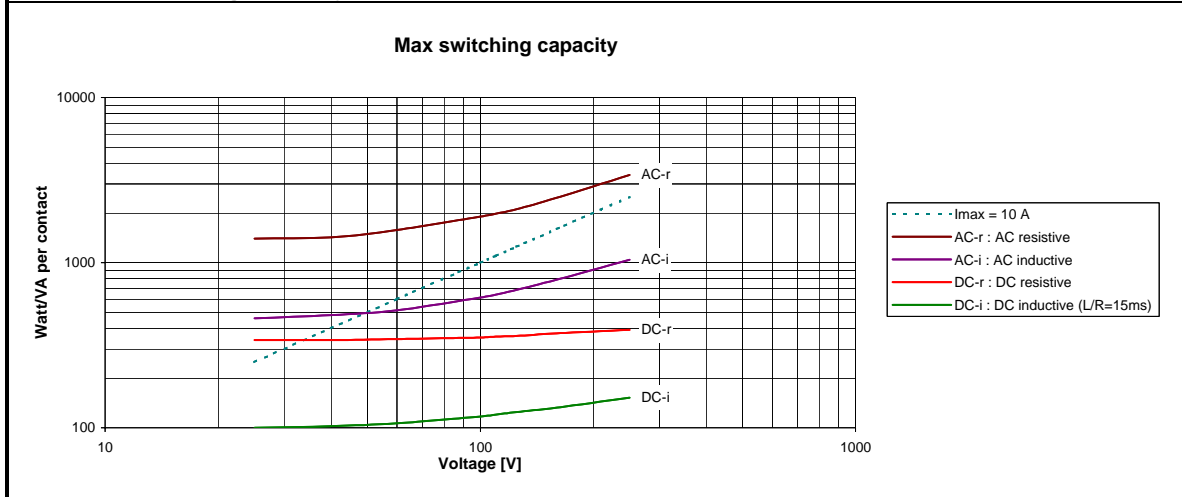


Datasheet		LATCHING RELAY			
Product		BD relay		Country of Origin: The Netherlands	
Dimensions		 <p>P.O. Box 7023 3502 KA Utrecht The Netherlands T +31 (0)30-288 13 11 F +31 (0)30-289 88 16 E sales@nieaf-smitt.nl I www.nieaf-smitt.nl</p>			
		<b>Connection Diagram</b> 			
<b>Description</b>					
Plug-in bistable relay with three change-over contacts and one normally closed contact.					
Bistable by means of a permanent magnet.					
<b>Coil data</b>					
Operating times at nominal voltage					
Supply range		85 % - 110 % * U <sub>nom</sub>			
Coil consumption		DC	1.7 W at U <sub>nom</sub>		
		AC	4 VA at U <sub>nom</sub>		
Min. Impuls time		DC	25 ms		
		AC	50 ms		
Bounce time		NO contacts	4 ms		
		NC contacts	8 ms		
Nominal voltages DC					
Type code	U <sub>nom</sub>	U <sub>pull in</sub>	R <sub>coil in</sub>	R <sub>coil off</sub>	
BD 12 VDC	12 V	9.6 V	134 Ω	141 Ω	
BD 24 VDC	24 V	19.2 V	485 Ω	514 Ω	
BD 48 VDC	48 V	38.4 V	1930 Ω	2070 Ω	
BD 60 VDC	60 V	48.0 V	3052 Ω	3047 Ω	
BD 110 VDC	110 V	88.0 V	8684 Ω	8716 Ω	
BD 125 VDC	125 V	100.0 V	11380 Ω	11420 Ω	
Nominal voltages AC 50 - 60 Hz					
Type code	U <sub>nom</sub>	U <sub>pull in</sub>	R <sub>coil in</sub>	R <sub>coil off</sub>	
BD 24 V	24 V	19.2 V	134 Ω	141 Ω	
BD 42 V	42 V	33.6 V	444 Ω	466 Ω	
BD 110 - 115 V	115 V	92.0 V	3052 Ω	3047 Ω	
BD 220 - 240 V	220 V	176.0 V	15910 Ω	16090 Ω	

Other voltages on request

Contact data			
Max. Make Current	16 A	Material	silver
Max. Cont. Current	10 A (AC1 ; IEC 947)	Contactgap	0.7 mm
Max. Breaking Capacity		Insulation between open contacts	2.5 kV, 50 Hz, 1 min
	DC 110 V, 1 A AC 440 V	Contactforce	> 200 mN
Min. Switching Voltage	12 V		
Max. Contact Resistance	15 mΩ		

#### Maximum Switching Capacity



#### General Data

Dielectric strength	Pole-Pole	IEC 255-5	4 kV, 50 Hz, 1 min
	Cont-Coil		2 kV, 50 Hz, 1 min
Insulation Class		IEC 255-5	serie C 380 V 50Hz/450 VDC
Pulse Withstanding		IEC 255-5	5 kV (1.2/50 μs)
Vibration		IEC 68-2-6	5 g at 50 Hz 2 g, 10-150 Hz
Shock		IEC 68-2-27	15 g, 11 ms
Mechanical life			$10^6$ ops
Max. Switching Frequency			1200 ops/h
Weight			135 g
Temperature	$T_{amb,max}$		+40 °C +60 °C, not energized      Higher T on request
	$T_{amb,min}$		-25 °C
Humidity			80%, condensation not permitted
Protection			IP 40
Materials			Makrolon Polyester
Options	B		Magnetic arc blow-out for increased DC contact life
	D		Back-EMF-protection in DC-version
	S		Mechanical position indication
	combinations		

**Australian Distributor**



**Relay Monitoring Systems Pty Ltd**  
6 Anzed Court  
Mulgrave, Victoria, 3170, Australia

Phone: +61 3 8544 1200  
Fax: +61 3 8544 1201  
Email: [rms@rmspl.com.au](mailto:rms@rmspl.com.au)  
Web: [www.rmspl.com.au](http://www.rmspl.com.au)