
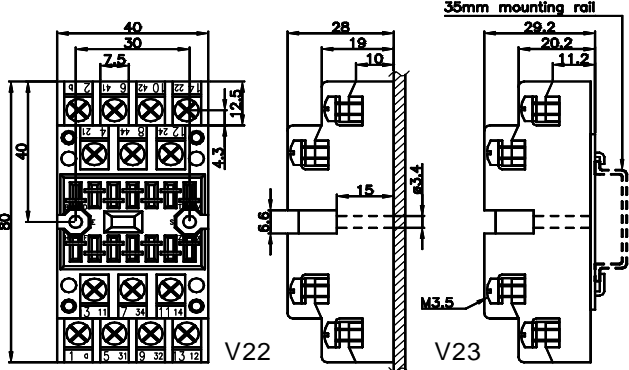


Datasheet		SOCKET	
Product		V22/ V23	
Article code	V22	338000300	Country of Origin: The Netherlands
	V23	338000400	
Dimensions			 <p>P.O. Box 7023 3502 KA Utrecht The Netherlands T +31 (0)30-288 13 11 F +31 (0)30-289 88 16 E sales@nieaf-smitt.nl I www.nieaf-smitt.nl</p>
			
Description			
Screw base with connection for two wires up to 2.5 mm ² per terminal.			
V22 is suitable for panelmounting and the V23 is suitable for 35mm mounting rail.			
Suitable for D and D-U relays.			
Contact rating	10 A (AC1)	IEC 60947	
Dielectric strength	2500 V; 50 Hz; 1 min	IEC 60255/ IEC 60571	
Protection category	IP 10, relay-side	IEC 60529	
Mounting	V22 panelmounting V23 35mm mounting rail	IEC 60715	
Max ambient temperature	80 °C		
Weight	V22 103 g V23 116 g		
Wire diameter	2 x 2.5 mm ²		
Material	Polyamide 66 35 % glass	Class 2 according to NF F 16-101 and 102	
Options	Key possibility		
Accessory	Key receptacle A104		

Australian Distributor



Relay Monitoring Systems Pty Ltd
6 Anzed Court
Mulgrave, Victoria, 3170, Australia

Phone: +61 3 8544 1200
Fax: +61 3 8544 1201
Email: rms@rmspl.com.au
Web: www.rmspl.com.au