
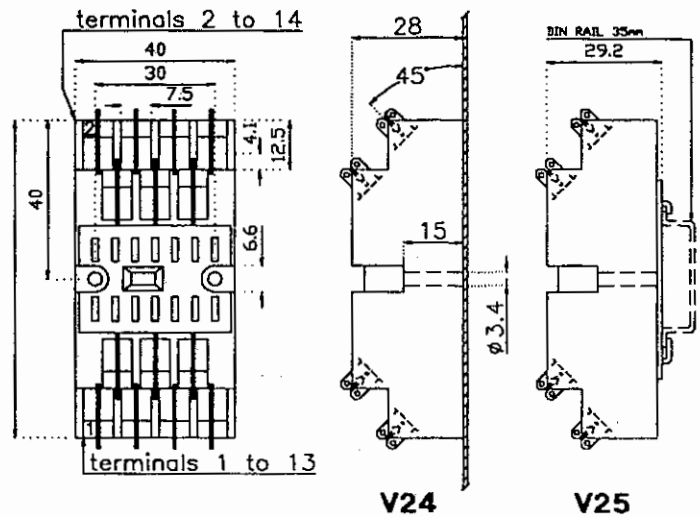


<b>Datasheet</b>			<b>Brand name</b>	<b>SMITT</b>
<b>Product</b>	<b>V24 / V25</b>		<b>Country</b>	<b>Holland</b>
<b>Article code</b>	<b>V24</b>	<b>338300100</b>		
	<b>V25</b>	<b>338300200</b>		
<b>Dimensions</b>			 <p>Po Box 7023 3502 KA Utrecht, Holland Tel: 31(0)30-2881311 Fax: 31(0)30-2898816</p>	
				

**Description**  
**Faston base with tabs for one faston of 6.8 x 0.8 mm or two of 2.8 x 0.8 per terminal.**  
**Suitable for D-U relays**

<b>Contact rating</b>	<b>10 A (AC1)</b>	<b>IEC 947</b>
<b>Dielectric strength</b>	<b>2500 V 50 Hz 1 min</b>	<b>IEC 255 / IEC 77</b>
<b>Protection category</b>	<b>IP 10</b>	<b>IEC 529</b>
<b>Mounting</b>	<b>V24 panelmounting</b> <b>V25 DIN rail</b>	<b>DIN EN 50022</b>
<b>Max ambient temperature</b>	<b>80 °C</b>	
<b>Weight</b>	<b>V24 80 gram</b> <b>V25 102 gram</b>	
<b>Wire cross section</b>	<b>not applicable</b>	
<b>Material</b>	<b>Polyamide 66, 25 % glass</b>	