


Datasheet **SOCKET**

Product **V28/ V29**
 Relay socket with double deck
 cage clamp spring terminals

Country of Origin: The Netherlands

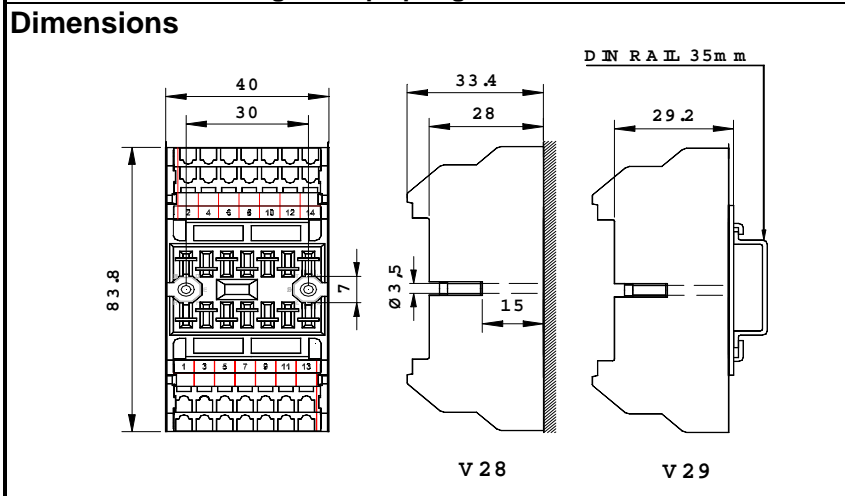

SMITT
RELAYS

P.O. Box 7024
 3503 KA Utrecht
 The Netherlands
T +31 (0)30-288 13 12
F +31 (0)30-289 88 17
E sales@nieaf-smitt.nl
I www.nieaf-smitt.nl

Description

Base with two high reliable cage clamp spring (WAGO) terminals per relay contact
 For solid and (fine) stranded wires up to 2.5 mm²
 Quick connection by pressing the cage clamp with a flat-bladed screw driver and inserting the stripped wire
 Suitable for D and D-U relays.
 Pinning on the socket complies with the pinning on the relay.

Contact rating	10 A (AC1)	IEC 947
Dielectric strength	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571
Protection category	IP 20	IEC 529
Mounting	V28 panelmounting V29 DIN rail	DIN EN 50022
Max ambient temperature	80 °C	
Weight	V28 78 g V29 100 g	
Wire diameter	0.08 - 2.5 mm²	
Material	Polyamide 6.6 30 % glass	Class 2 according to NF F 16-101 and 102
Options	Key possibility	
Accessory	Key receptacle A104	

Australian Distributor



Relay Monitoring Systems Pty Ltd
6 Anzed Court
Mulgrave, Victoria, 3170, Australia

Phone: +61 3 8544 1200
Fax: +61 3 8544 1201
Email: rms@rmspl.com.au
Web: www.rmspl.com.au