
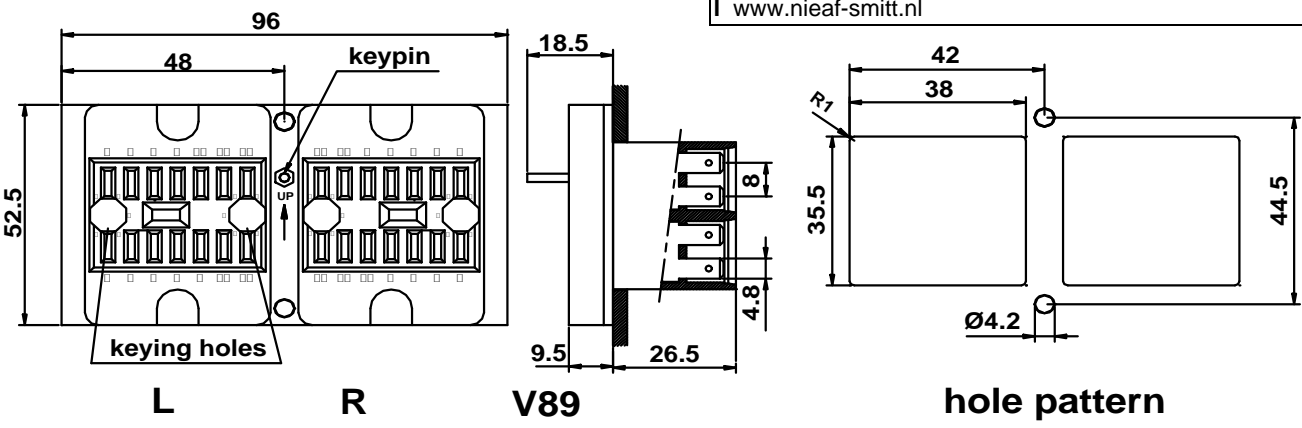


Datasheet		SOCKET																												
<b>Product</b> V89 Relay socket for panel mount with double faston connection		Country of Origin: The Netherlands																												
<b>Article code</b> 338001800		 P.O. Box 7023 3502 KA Utrecht The Netherlands T +31 (0)30-288 13 11 F +31 (0)30-289 88 16 E sales@nieaf-smitt.nl I www.nieaf-smitt.nl																												
<b>Dimensions</b>																														
																														
<b>Description</b> Base with two faston (4.8 mm) connections per relay connection. Suitable for KDN, KDN-U, D8 and D8-U relays																														
<table border="1"> <tr> <td><b>Contact rating</b></td> <td>10 A (AC1)</td> <td>IEC 947</td> </tr> <tr> <td><b>Dielectric strength</b></td> <td>2500 V; 50 Hz; 1 min</td> <td>IEC 255/ IEC 571</td> </tr> <tr> <td><b>Protection category</b></td> <td>IP 20, relay-side</td> <td>IEC 529</td> </tr> <tr> <td><b>Mounting</b></td> <td>V89 panelmounting</td> <td></td> </tr> <tr> <td><b>Max ambient temperature</b></td> <td>80 °C</td> <td></td> </tr> <tr> <td><b>Weight</b></td> <td>V89 150 g</td> <td></td> </tr> <tr> <td><b>Material</b></td> <td>Polyamide 6.6 30 % glass</td> <td>Class 2 according to NF F 16-101 and 102</td> </tr> <tr> <td><b>Options</b></td> <td>Key possibility</td> <td></td> </tr> <tr> <td><b>Accessory</b></td> <td>Key receptacle A104</td> <td></td> </tr> </table>		<b>Contact rating</b>	10 A (AC1)	IEC 947	<b>Dielectric strength</b>	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571	<b>Protection category</b>	IP 20, relay-side	IEC 529	<b>Mounting</b>	V89 panelmounting		<b>Max ambient temperature</b>	80 °C		<b>Weight</b>	V89 150 g		<b>Material</b>	Polyamide 6.6 30 % glass	Class 2 according to NF F 16-101 and 102	<b>Options</b>	Key possibility		<b>Accessory</b>	Key receptacle A104			
<b>Contact rating</b>	10 A (AC1)	IEC 947																												
<b>Dielectric strength</b>	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571																												
<b>Protection category</b>	IP 20, relay-side	IEC 529																												
<b>Mounting</b>	V89 panelmounting																													
<b>Max ambient temperature</b>	80 °C																													
<b>Weight</b>	V89 150 g																													
<b>Material</b>	Polyamide 6.6 30 % glass	Class 2 according to NF F 16-101 and 102																												
<b>Options</b>	Key possibility																													
<b>Accessory</b>	Key receptacle A104																													

**Australian Distributor**



**Relay Monitoring Systems Pty Ltd**  
6 Anzed Court  
Mulgrave, Victoria, 3170, Australia

Phone: +61 3 8544 1200  
Fax: +61 3 8544 1201  
Email: [rms@rmspl.com.au](mailto:rms@rmspl.com.au)  
Web: [www.rmspl.com.au](http://www.rmspl.com.au)