


**Datasheet**

**SOCKET**

<b>Product</b>	<b>V92/ V93</b>	
<b>Article code</b>	<b>V92</b>	<b>338002900</b>
	<b>V93</b>	<b>338003900</b>

Country of Origin: The Netherlands

**Dimensions**

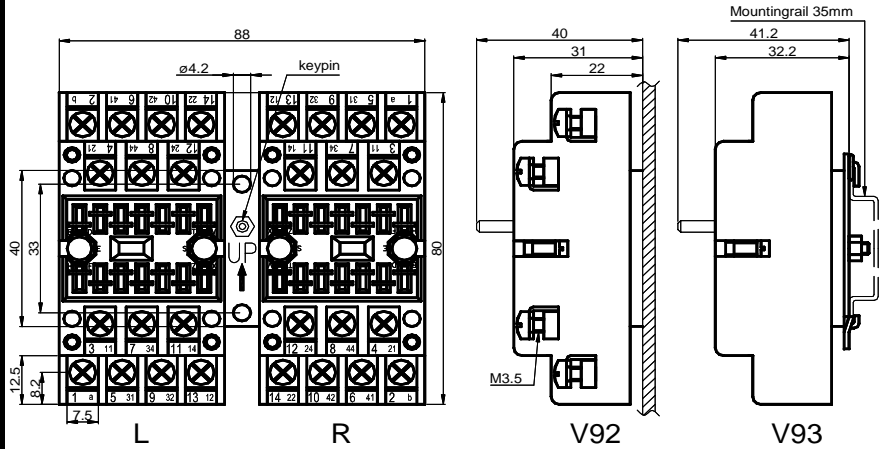

P.O. Box 7023  
 3502 KA Utrecht  
 The Netherlands  
 T +31 (0)30-288 13 11  
 F +31 (0)30-289 88 16  
 E sales@nieaf-smitt.nl  
 I www.nieaf-smitt.nl

**Description**

Screw base with connection for two wires up to 2.5 mm<sup>2</sup> per terminal.  
 Suitable for KDN, KDN-U, D8 and D8-U relays.

<b>Contact rating</b>	10 A (AC1)	IEC 60947
<b>Dielectric strength</b>	2500 V; 50 Hz; 1 min	IEC 60255/ IEC 60571
<b>Protection category</b>	IP 10, relay-side	IEC 60529
<b>Mounting</b>	V92 panelmounting V93 Mountingrail 35mm	NEN-EN-IEC 60715
<b>Max ambient temperature</b>	80 °C	
<b>Weight</b>	V92 320 g V93 360 g	
<b>Wire diameter</b>	2 x 2.5 mm <sup>2</sup>	
<b>Material</b>	Polyamide 6.6 25 % glass	
<b>Options</b>	Key possibility	
<b>Accessory</b>	Key receptacle A104	

**Australian Distributor**



**Relay Monitoring Systems Pty Ltd**  
6 Anzed Court  
Mulgrave, Victoria, 3170, Australia

Phone: +61 3 8544 1200  
Fax: +61 3 8544 1201  
Email: [rms@rmspl.com.au](mailto:rms@rmspl.com.au)  
Web: [www.rmspl.com.au](http://www.rmspl.com.au)