
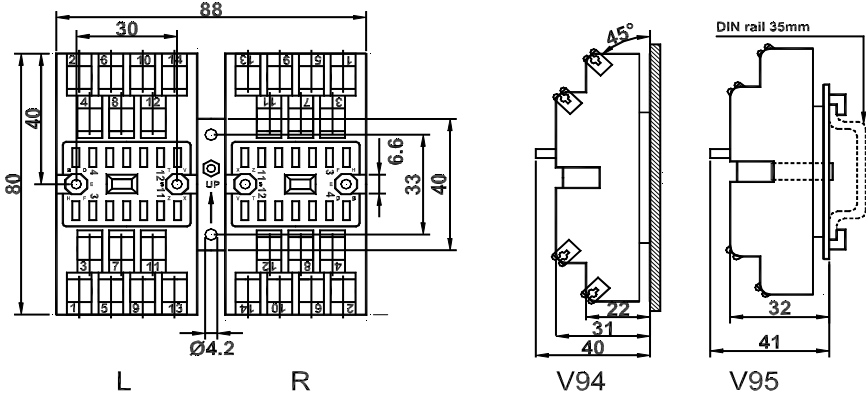


Datasheet		SOCKET	
Product		V94/ V95	
Article code	V94	338300300	Country of Origin: The Netherlands
	V95	338300400	
Dimensions			 <p>P.O. Box 7023 3502 KA Utrecht The Netherlands T +31 (0)30-288 13 11 F +31 (0)30-289 88 16 E sales@nieaf-smitt.nl I www.nieaf-smitt.nl</p>
			
Description			
Faston base with tabs for one faston of 6.8 x 0.8 mm or two of 2.8 x 0.8 per terminal. Suitable for KDN, KDN-U, D8 and D8-U relays.			
Contact rating	10 A (AC1)	IEC 947	
Dielectric strength	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571	
Protection category	IP 10	IEC 529	
Mounting	panelmounting DIN rail	DIN EN 50022	
Max ambient temperature	80 °C		
Weight	V94 229 g V95 266 g		
Wire cross section	not applicable		
Material	polyamide 66 25 % glass		
Options	Key possibility		
Accessory	Key receptacle A104		

Australian Distributor



Relay Monitoring Systems Pty Ltd
6 Anzed Court
Mulgrave, Victoria, 3170, Australia

Phone: +61 3 8544 1200
Fax: +61 3 8544 1201
Email: rms@rmspl.com.au
Web: www.rmspl.com.au