
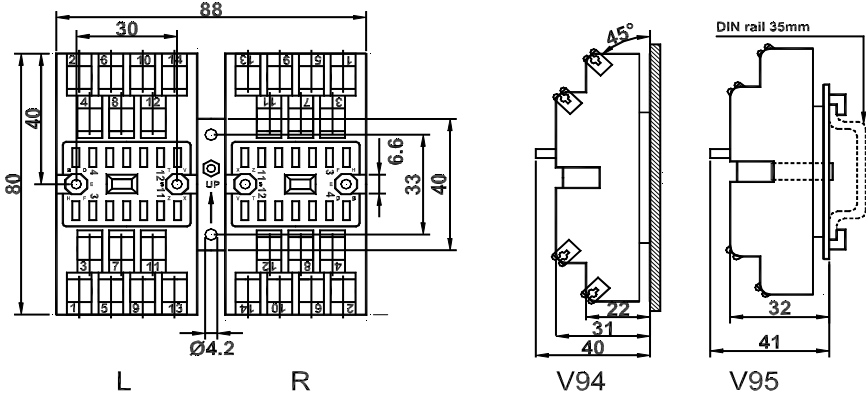


Datasheet		SOCKET	
<b>Product</b>		<b>V94/ V95</b>	
<b>Article code</b>	V94	338300300	<b>Country of Origin:</b> The Netherlands
	V95	338300400	
<b>Dimensions</b>			 <p>P.O. Box 7023 3502 KA Utrecht The Netherlands T +31 (0)30-288 13 11 F +31 (0)30-289 88 16 E sales@nieaf-smitt.nl I www.nieaf-smitt.nl</p>
			
<b>Description</b>			
Faston base with tabs for one faston of 6.8 x 0.8 mm or two of 2.8 x 0.8 per terminal. Suitable for KDN, KDN-U, D8 and D8-U relays.			
<b>Contact rating</b>	10 A (AC1)	IEC 947	
<b>Dielectric strength</b>	2500 V; 50 Hz; 1 min	IEC 255/ IEC 571	
<b>Protection category</b>	IP 10	IEC 529	
<b>Mounting</b>	panelmounting DIN rail	DIN EN 50022	
<b>Max ambient temperature</b>	80 °C		
<b>Weight</b>	V94 229 g V95 266 g		
<b>Wire cross section</b>	not applicable		
<b>Material</b>	polyamide 66 25 % glass		
<b>Options</b>	<b>Key possibility</b>		
<b>Accessory</b>	<b>Key receptacle A104</b>		