



2P48K10 Test Manual

Phase Failure Relay

relay monitoring systems pty ltd

Advanced Protection Devices



User Guide



Test Manual



2P48K10 Test Manual

Links to Other Documents

- Technical Bulletin: <http://www.rmspl.com.au/handbook/2P48.pdf>
- User Guide: http://www.rmspl.com.au/userguide/2P48_user_guide.pdf
- Application: http://www.rmspl.com.au/solutions/2948_application.pdf
- Acad Case Drawings: <http://www.rmspl.com.au/2P48acad.htm>

Test Certification

This is to certify that the equipment detailed below has been manufactured, inspected & tested in accordance with a Quality System which complies with the requirements of AS/NZS ISO9001-2000.

Order Number	Serial Number

Only valid when the "Passed" box has been signed off by Production Personnel.

Version Control

Issue	Date	Summary of changes
A	05/05/2005	Released.

Due to RMS continuous product improvement policy, this information is subject to change without notice.
This document is uncontrolled and subject to copyright.

Author	Checked & Registered	.pdf file created	Released
ERL	DG	DG	



1.0 HARDWARE SPECIFICATIONS – 2P048K10 [B][B][B]

1.1 Sensing Supply

[B] 415 50Hz (No front panel indicators)

1.2 Time Delay

[B] Not required

1.3 Magnetic Blowouts

[B] Not required

1.4 Non-Standard Features

Hardware specifications not described in Technical Bulletin. None


2.0 VERIFICATION

This is to certify that the equipment has been manufactured, inspected and tested in accordance with a Quality System, which complies with the requirements of ISO9001: 2000.

Testing has been carried out against the declared performance specification 162-048-800 and in accordance with the relevant International (IEC) Standards.

PASSED BY	DATE

3.0 CONNECTION DIAGRAM

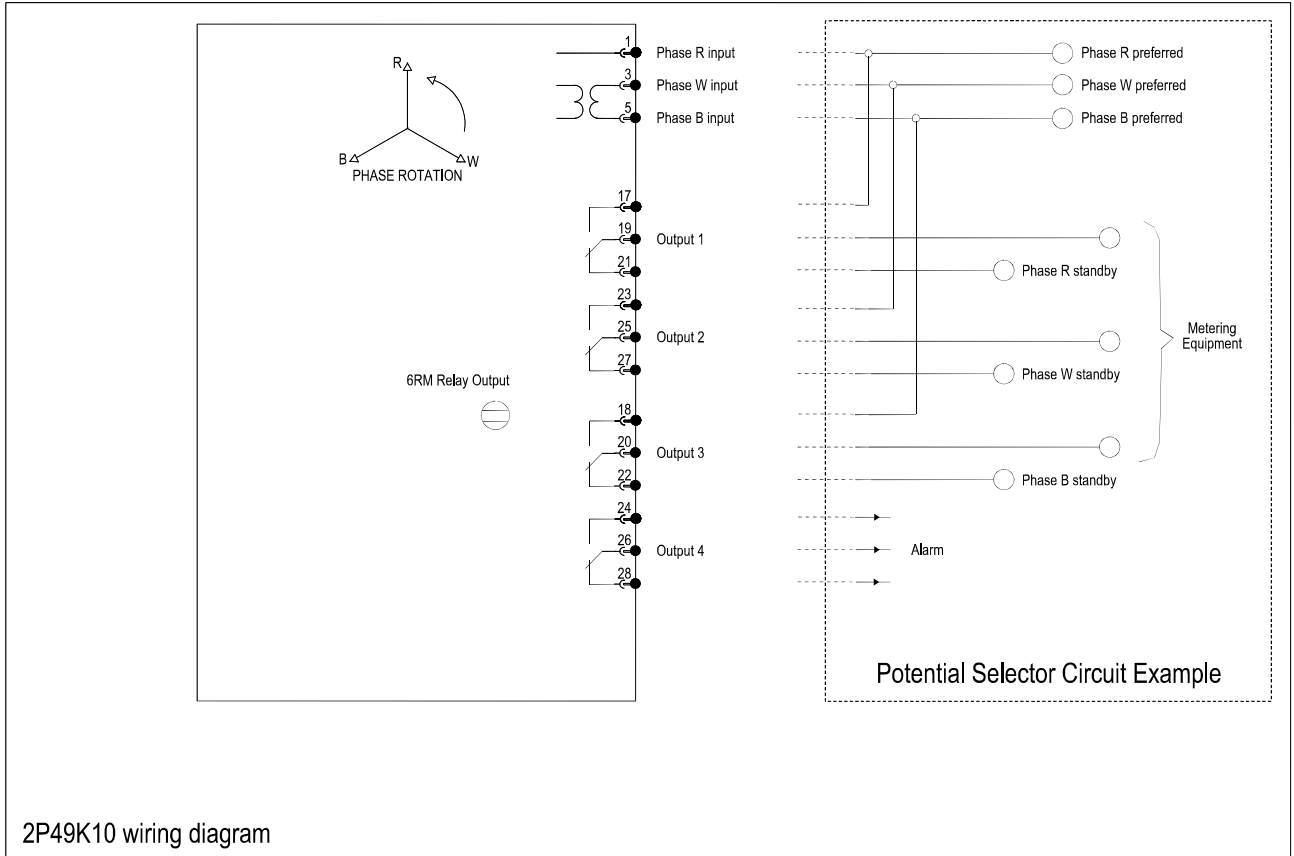

2P49K10 wiring diagram